HOSE, CORD, & CABLE REELS



EZ-COIL® REELS



Hose, cord, and cable reels are essential components for applications that require high product flow and/or longer hose such as general duty, automotive dealerships, and service garages. Whether you need a low, medium or high-pressure rating, for grease, oil or air and water, Coxreels offers a reel to fit the application.

The Recognized Industry Leader

Coxreels is wholesale only since 1923. Our product is made to high standards, supplying industrial grade product to distributors and OEMs worldwide. We are recognized as the leader in the reeling industry. We have been providing the most complete and diverse line of hose, cord, and cable reels for 10 decades!

The Most Complete Line of Safety Reels in the Market

Coxreels' safety hose reels are designed to ensure long life in the toughest environments where large hose diameters or long lengths are required for increased flow and versatility.

Possible fields of application:

- Air/Water Services
- Chemical Fluid Transfer
- Fuel Delivery
- Sevice / Utility Trucks
- Pneumatic Tools
- Cabinet Mount

- Lubrication
- General Industrial
- Chemical Plants
- Power Tools
- Construction sites
- Pipelines

- Welding Shops
- Mining & Railroad
- DEF Storage
- Aircraft Refueling
- Nitrogen Dispensing
- Potable Water

Proven Reeling Solutions to Safety Needs!

Safety hose reels not only make hoses last longer, they save time and allow for hassle-free maintenance. Compact design and quality steel construction are incorporated into Coxreels' diverse line of automotive reels. No matter what your application, we have a solution for you!

Our versatile and wide reel selection handles various capacities and comes in different sizes to suit any service vehicle requirement. Our standard reeling devices suggested in this catalog are already specified to meet the needs of the utility and service markets. Coxreels also has the engineering power to design and build custom reels, so please consult the factory if you cannot locate a reel that will work with your equipment, we will be happy to assist you with a solution.

VALUE THE DIFFERENCE...

Make COXREELS your reel choice!



PROFESSIONAL GRADE FEATURES

A HIGHER LEVEL OF STANDARDS



CPC™ POWDER COAT

Our blue powder coat finish is long lasting, chip resistant & rust inhibiting



BRASS SWIVEL

External fluid path, machined from solid brass, full flow, swivel for simple seal maintenance



STEEL AXLE

1" solid steel axle & lubricated bearings for extra strength & durability. Not a hollow tube & no fluid travels through it



STEEL CONSTRUCTION

High-Quality steel construction provides superior strenght and durability for heavy-duty applications in commercial and industrial settings



COMPONENT COVER

External CPC powder coated steel components cover for simple slip ring routine maintenance



EZ-COIL® SERIES

A patented safety system that retracts up to 80% slower than conventional reels



CNC SPUN DISCS

All steel rolled edges & ribbed discs for added safety, strength & durability



CARTRIDGE MOTOR

Enclosed factory tuned & matched cartridge style motor for safe & easy replacement



LOW PROFILE RISER

Low profile riser with open drum slot allows for smooth even hose wraps that will not pinch or bind your hose. **NO HUMP!**



ALL WELDED STEEL
"A" FRAME

All welded steel "A" frame for strength & durability. **NOT BOLTED!**




2 YEAR WARRANTY

Coxreels proudly stands behind our reels as they are built to last!



USA MADE, QUALITY & SUPPORT

We take great pride in designing, building & supplying the world's finest reels made right here in the U.S.A.

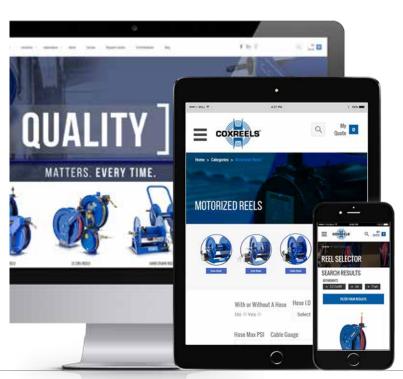

DESIGNED WEBSITE

Coxreels is excited to introduce our new, userfriendly website. Coxreels is committed to providing our customers with the ultimate online experience as they navigate through the most complete and diverse line of hose, cord, and cable reels.

We are ecstatic with the results and we think you will be too!













SAFETY CONTROLLED RETRACTION

COXREELS Safety Series reels featuring the patented EZ-Coil® Rewind Safety System, engineered and developed exclusively by Coxreels, are the only choice for safe spring driven hose, cord, and cable reel operation in the workplace. EZ-Coil® works uni-directionally without any increase to the amount of resistance when pulling out the hose, cord, or cable. But, when engaged upon recoil, it controls the aggressive spring motor energy resulting in a reel that retracts at a safe and steady pace!

INCREASED SAFETY HOW?

- Reduce retraction speed by up to 80%
- Control hose or cord whip hazard
- Requires no external power source
- Enhance operator & workplace safety
- Keep your workplace organized
- Utilize space & maximize efficiency
- Improve hose, cord, & cable management
- Extend longevity of hose, cord, & cable
- Increase productivity



up (Slower F	etraction
"(Conventional SPRING DRIVEN REELS	COXREELS
	SPEED	25 ft./sec.	5 ft./sec.
	WHIPPING	5-15 ft.	1 ft.
	IMPACT	500 ft./lbs.	0-1ft./lbs.

Based on an independent evaluation performed by COXREELS. Depending on certain conditions, results may vary.









Our patented safety system with RETRACTION SPEED UP TO 80% SLOWER THAN CONVENTIONAL SPRING DRIVEN REELS

SPIRAL HOSE GUARD protects hose against premature wear

HEAVY DUTY, SPUN DISCS with rolled edges for greater strength, made with first of it's kind CNC robotic spin cell •

ADJUSTABLE. SOLID RUBBER HOSE STOP

for lead length positioning •

VERSATILE GUIDE ARM made from 10 gauge steel with stamped ribs for added rigidity, adjusts to wall, floor, ceiling, & vehicle mounting .

SOLID STEEL ZINC PLATED LOCKING RING offers 8 ratchet positions per rotation for ease of use •

LOCKING PAWL, SPECIALLY ANGLED prevents lockout, both pawl and spring are from stainless steel for trouble free longevity

EXTERNAL FLUID PATH MACHINED FROM SOLID BRASS 90° FULL-FLOW NPT SWIVEL that screws directly on 1" solid steel axle, provides simple seal maintenance & fast and easy hose installation •

HIGH QUALITY STEEL CONSTRUCTION

with our durable CPC™ powder coat finish •

ENCLOSED FACTORY TUNED AND MATCHED CARTRIDGE-STYLE SPRING MOTOR for safe & easy maintenance

HEAVY GAUGE 1/4" STEEL BASE & SUPPORT POST, SINGLE PIECE CONSTRUCTION WITH NO WELDS

for maximum stability

SUPER HUB™ EQUIPPED MODELS:

INCREASED REEL STRENGTH for more demanding applications with multiple support to the axle





CORD REELS FEATURE:

HEAVY GAUGE POWDER COATED STEEL COMPONENTS COVER protecting the slip ring & all electrical components

INCLUDES 5' LEAD CABLE & GROUNDING PLUG

(Except on less cord models) .

CHOICE OF ELECTRICAL ACCESSORIES















EZ-P SERIES

PERFORMANCE HOSE REELS



COXREELS® EZ-P Series "Performance" spring driven hose reels have a long history of dependability and hassle free performance. Their compact space-saving size and heavy duty construction make them highly versatile and virtually indestructible. Time-tested proven components, superior design and craftsmanship have contributed to it's worldwide reputation as the most trusted hose reel.

APPLICATIONS ____////

- Air/Water Services
- Pneumatic Tools
- Washdown
- Lubrication
- Chemical Fluid Transfer
- General Industrial

- Manufacturing Plants & Facilities
- Maintenance, Repair & Operations
- Automotive & Fleet Service Centers

EZ-P SERIES :: REEL SPECIFICATIONS

SWIVEL

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Zinc plated steel swivel on HP models)
- Swivel Seals: NITRILE

DESIGN & STRUCTURE

- Sturdy, single pedestal reel with space saving design facilitates workplace organization
- Guide arm adjusts to wall, floor, vehicle, & overhead positions
- Solid, one piece, heavy gauge 1/4" steel base & support post for maximum stability
- 1" solid steel axle & lubricated precision bearings for smooth rotation

EZ-COIL RETRACTION

- OUR PATENTED SAFETY SYSTEM THAT RETRACTS UP TO 80% SLOWER THAN CONVENTIONAL SPRING DRIVEN REELS
- Enclosed, factory tuned & matched cartridge-style spring motor
- Non-corrosive, stainless steel spring, pawl, & zinc plated ratchet
- Multi-position lock ratchet mechanism secures hose at desired length

SIGNATURE FEATURES

- · Professional grade, heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- · Rolled edges & ribbed discs provide strength & safety
- · Leading 2-year manufacturer's limited warranty
- · Made in the U.S.A. Sold & Supported Worldwide

ACCESSORIZE YOUR REEL :: PG 17


- 0-Rings & Swivels
- Hoses
- Mounting Brackets
- · Assorted Reel Accessories

EZ-P SERIES

Do not exceed listed hose O.D. to obtain maximum length.

	HO	SE				LESS HOSE		SIZE
MODEL	I.D.	0.D.	FT.	PSI	APRX. LBS.	MODEL	APRX. LBS.	INDEX
LOW PRESSURE		th hose are ss hose can				kimum temperature 150°F.		
EZ-P-LP-125	1/4"	1/2"	25	300	27	EZ-P-LPL-125	24	1
EZ-P-LP-135	1/4"	1/2"	35	300	28	EZ-P-LPL-135	25	1
EZ-P-LP-150	1/4"	1/2"	50	300	40	EZ-P-LPL-150	35	3
EZ-P-LP-325	3/8"	5/8"	25	300	28	EZ-P-LPL-325	25	2
EZ-P-LP-330	3/8"	5/8"	30	300	37	EZ-P-LPL-330	33	3
EZ-P-LP-335	3/8"	5/8"	35	300	38	EZ-P-LPL-335	34	3
EZ-P-LP-350	3/8"	5/8"	50	300	43	EZ-P-LPL-350	36	3
EZ-P-LP-430	1/2"	3/4"	30	300	45	EZ-P-LPL-430	40	4
EZ-P-LP-450	1/2"	3/4"	50	300	48	EZ-P-LPL-450	43	4
MEDIUM PRESSURE						e suitable for air, water or oil re 212°F (If used with water, syn		
EZ-P-MP-425	1/2"	13/16"	25	2,500	49	EZ-P-MPL-425	42	4
EZ-P-MP-430	1/2"	13/16"	30	2,500	51	EZ-P-MPL-430	43	4
HIGH PRESSURE						or #2 wire braid hose suitable 2°F. (If used with water, synthetic f		
EZ-P-HP-125	1/4"	9/16"	25	5,000	48	EZ-P-HPL-125	42	4
EZ-P-HP-325	3/8"	11/16"	25	4,000	49	EZ-P-HPL-325	42	4

9	SIZE INDEX	W	н	L	Х	Y	М	N
	1	5 ⁷ /8"	147⁄8"	131/2"	5"	6"	3"	5"
	2	61/2"	147/8"	131/2"	5"	6"	3"	5"
	3	63/4"	185⁄8"	171/8"	6"	6"	4"	5"
	4	7"	185⁄8"	171/8"	6"	6"	4"	5"
_			Overall Dimension	s	Ba Ba	se -	Mounting Mounting	Pattern —





HEAVY DUTY HOSE REELS EZ-SH, EZ-MP & EZ-HP SERIES

COXREELS® EZ-SH Series "Super Hub™" spring driven hose reels, like the EZ-P Series, have a long history of dependable performance. The larger chassis and frame accommodate longer lengths and larger diameters of hose. Coxreels' original Super Hub™ dual axle support system increases the stability during operation, reduces vibration and strengthens the structural integrity of the reel.

APPLICATIONS ____////

- Air/Water Services
- Pneumatic Tools
- Washdown
- Lubrication
- Chemical Fluid Transfer
- General Industrial
- Manufacturing Plants & Facilities
- Maintenance, Repair& Operations
- Automotive & Fleet Service Centers
- Service / Mechanic / Utility Vehicles



EZ-SH, EZ-MP & EZ-HP SERIES

Do not exceed listed hose O.D. to obtain maximum length.

	HO	SE				LESS HOSE		SIZE
MODEL	I.D.	0.D.	FT.	PSI	APRX. LBS.	MODEL	APRX. LBS.	INDEX
LOW PRESSURE				ater servic for air, wa		aximum temperature 150°F.		
EZ-SH-N-350	3/8"	5/8"	50	300	50	EZ-SHL-N-350	44	1
EZ-SH-N-375	3/8"	5/8"	75	300	68	EZ-SHL-N-375	59	2
EZ-SH-N-3100	3/8"	5/8"	100	300	71	EZ-SHL-N-3100	60	2
EZ-SH-N-450	1/2"	3/4"	50	300	54	EZ-SHL-N-450	46	1
EZ-SH-N-475	1/2"	3/4"	75	300	68	EZ-SHL-N-475	57	3
EZ-SH-N-4100	1/2"	3/4"	100	300	81	EZ-SHL-N-4100	66	3
EZ-SH-N-525	3/4"	11/16"	25	300	52	EZ-SHL-N-525	45	4
EZ-SH-N-550	3/4"	1 ¹ /16"	50	300	69	EZ-SHL-N-550	56	5
MEDIUM PRESSURE						ose suitable for air, water or oil aperature 250°F.	application	S.
EZ-MP-N-350	3/8"	11/16"	50	3,000	65	EZ-MPL-N-350	53	1
EZ-MP-N-450	1/2"	13/16"	50	2,500	67	EZ-MPL-N-450	53	6
HIGH PRESSURE					100R16 #1 perature 2	l or #2 wire braid hose suitable 50°F.	e for grease	and
EZ-HP-N-150	1/4"	9/16"	50	5,000	64	EZ-HPL-N-150	53	6
EZ-HP-N-350	3/8"	11/16"	50	4,000	65	EZ-HPL-N-350	53	7

REEL DIMENSIONS Technical Data Sheets Available On Website

SIZE INDEX	W	н	L	Х	Y	М	N
1	81/4"	211/4"	191/2"	6"	6"	4"	5"
2	81/4"	251/2"	24"	6"	6"	4"	5"
3	8¾"	251/2"	24"	6"	6"	4"	5"
4	9¾"	211/4"	191/2"	6"	6"	4"	5"
5	97/8"	251/2"	24"	6"	6"	4"	5"
6	83/4"	211/4"	191/2"	6"	6"	4"	5"
7	91/4"	211/4"	191/2"	6"	6"	4"	5"
		Overall Dimension	s	Ba	ise —	Mountin	g Pattern —

EZ-SH, EZ-MP & EZ-HP SERIES :: REEL SPECIFICATIONS

SWIVEL

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Zinc plated steel swivel on HP models)
- · Swivel Seals: NITRILE

DESIGN & STRUCTURE

- Sturdy, single pedestal reel features Coxreels' exclusive Super HubTM dual axle support system
- Guide arm adjusts to wall, floor, vehicle, & overhead positions
- Solid, one piece, heavy gauge 1/4" steel base & support post for maximum stability
- 1" solid steel axle & lubricated precision bearings for smooth rotation

FINE RETRACTION

- OUR PATENTED SAFETY SYSTEM THAT RETRACTS UP TO 80% SLOWER THAN CONVENTIONAL SPRING DRIVEN REELS
- Enclosed factory tuned & matched cartridge-style spring motor
- Non-corrosive, stainless steel spring, pawl, & zinc plated ratchet
- Multi-position lock ratchet mechanism secures hose at desired length


SIGNATURE FEATURES

- · Professional grade, heavy duty steel construction
- Durable proprietary CPC[™] powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. Sold & Supported Worldwide

ACCESSORIZE YOUR REEL :: PG 17

- 0-Rings & Swivels
- Mounting Brackets
- Hoses





EZ-T SERIES

SUPREME DUTY HOSE REELS



COXREELS® EZ-T Series "Truck Mount" spring driven hose reels are the toughest hose reels in the spring driven line. The extra large chassis with dual pedestal-style arms and Coxreels' Super Hub™ provides triple axle support while reducing vibration and strengthening the structural integrity of the reel. This series is ideal for off-road applications that demand reliability in the most abusive and demanding environments.

APPLICATIONS ____////

- Air/Water Services
- Pneumatic Tools
- Washdown
- Lubrication
- Fuel Delivery
- Chemical Fluid Transfer
- General Industrial

- Manufacturing Plants
- Lube Skids & Trucks
- Service/Mechanic/Utility Vehicles
- Mining, Construction, & Railroad Operations
- Automotive & Fleet Service Centers

EZ-T SERIES :: REEL SPECIFICATIONS

SWIVEL

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Zinc plated steel swivel on HP models)
- · Swivel Seals: NITRILE
- · Electroless nickel plated steel swivel on 1" models

DESIGN & STRUCTURE

- Sturdy, dual pedestal reel features Coxreels' exclusive Super Hub™ triple axle support system
- · Built for rugged mobile applications
- Guide arm adjusts to wall, floor, vehicle, & overhead positions
- \bullet Stainless Steel rollers on $^3\slash\!4"$ & 1" models
- \bullet Solid one piece, heavy gauge $^{1}\mbox{/4"}$ steel base & support posts for maximum strength
- 1" solid steel axle & lubricated precision bearings for smooth rotation

EZ-COIL RETRACTION

- OUR PATENTED SAFETY SYSTEM THAT RETRACTS UP TO 80% SLOWER THAN CONVENTIONAL SPRING DRIVEN REELS
- Enclosed factory tuned & matched cartridge-style spring motor
- Non-corrosive, stainless steel spring, pawl, & zinc plated ratchet
- Multi-position lock ratchet mechanism secures hose at desired length

SIGNATURE FEATURES

- · Professional grade, heavy duty steel construction
- Durable proprietary CPC[™] powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- · Made in the U.S.A. Sold & Supported Worldwide

ACCESSORIZE YOUR REEL :: PG 17


- · 0-Rings & Swivels
- Hoses
- · Mounting Brackets
- · Assorted Reel Accessories

EZ-T SERIES

Do not exceed listed hose O.D. to obtain maximum length.

					20	0.00000		
	HO	SE				LESS HOSE		SIZE
MODEL	I.D.	0.D.	FT.	PSI	APRX. LBS.	MODEL	APRX. LBS.	INDEX
LOW PRESSURE				ater servio for air, wa		naximum temperature 150°F.		
EZ-TSH-350	3/8"	5/8"	50	300	61	EZ-TSHL-N-350	55	1
EZ-TSH-375	3/8"	5/8"	75	300	82	EZ-TSHL-N-375	73	2
EZ-TSH-3100	3/8"	5/8"	100	300	85	EZ-TSHL-N-3100	74	2
EZ-TSH-450	1/2"	3/4"	50	300	63	EZ-TSHL-N-450	55	1
EZ-TSH-475	1/2"	3/4"	75	300	82	EZ-TSHL-N-475	71	2
EZ-TSH-4100	1/2"	3/4"	100	300	95	EZ-TSHL-N-4100	80	2
EZ-TSH-535	3/4"	11/16"	35	300	77	EZ-TSHL-N-535	67	3
EZ-TSH-550	3/4"	1 ¹ /16"	50	300	83	EZ-TSHL-N-550	70	3
MEDIUM PRESSURE						ose suitable for air, water or oil an aperature 250°F.	applications	
EZ-TMP-350	3/8"	11/16"	50	3,000	74	EZ-TMPL-N-350	61	1
EZ-TMP-375	3/8"	11/16"	75	3,000	99	EZ-TMPL-N-375	80	2
EZ-TMP-450	1/2"	13/16"	50	2,500	77	EZ-TMPL-N-450	64	1
EZ-TMP-475	1/2"	13/16"	75	2,500	100	EZ-TMPL-N-475	80	2
EZ-TMP-550	3/4"	1 ¹ /16"	50	1,500	94	EZ-TMPL-N-550	74	3
HIGH PRESSURE					100R16 #1 perature 2	1 or #2 wire braid hose suitable 50°F.	for grease	and
EZ-THP-150	1/4"	9/16"	50	5,000	74	EZ-THPL-N-150	62	1
EZ-THP-175	1/4"	9/16"	75	5,000	88	EZ-THPL-N-175	71	2
EZ-THP-1100	1/4"	9/16"	100	5,000	104	EZ-THPL-N-1100	82	2
EZ-THP-350	3/8"	11/16"	50	4,000	78	EZ-THPL-N-350	66	1
EZ-THP-375	3/8"	11/16"	75	4,000	98	EZ-THPL-N-375	80	2

SIZE INDEX	w	н	L	Х	Y	М	N
1	93/8"	21 ¹ /4"	19½"	8"	9"	7"	8"
2	93/8"	251/2"	24"	8"	9"	7"	8"
3	97/8"	25 ¹ /2"	24"	8"	9"	7"	8"
		Overall Dimension	ins	Ba Ba	se	Mountin	g Pattern —





ENCLOSED HOSE REELS

EZ-EN SERIES

COXREELS® EZ-EN Series "Enclosed" spring driven hose reels are protected by a powder coated steel casing that shields out the elements to protect and extend the life of the reel, the hose, and the components inside. This series adds a neat, tidy, aesthetic appearance to work environments that demand a clean and professional look. The three piece casing is easy to assemble and disassemble for simple installation and maintenance.



- Air/Water Services
- Pneumatic Tools
- Washdown
- Lubrication
- Chemical Fluid Transfer
- General Industrial
- Restaurants & Commercial Kitchens
- Grocery Stores
- Food & Chemical Plants



EZ-EN SERIES


Do not exceed listed hose O.D. to obtain maximum length.


	H	OSE				LESS HOSE		SIZE
MODEL	I.D.	0.D.	FT.	PSI	APRX. LBS.	MODEL	APRX. LBS.	INDEX
LOW PRESSURE					rvice with a ma water or oil.	aximum temperature 150°F.		
EZ-EN-325	3/8"	5/8"	25	300	49	ENL-N-325	46	1
EZ-EN-350	3/8"	5/8"	50	300	65	ENL-N-350	58	2
EZ-EN-425	1/2"	3/4"	25	300	63	ENL-N-425	58	1
EZ-EN-450	1/2"	3/4"	50	300	69	ENL-N-450	64	2
MEDIUM PRESSURE	Reels ar Hose ex	e furnishe ceeds SA	ed with st E R1 spe	tandard one cifications.	wire braid hos Maximum Tem	se suitable for air, water or oil a perature 250°F.	applications	
EZ-ENM-325	3/8"	11/16"	25	3,000	61	ENML-N-325	54	1
EZ-ENM-350	3/8"	11/16"	50	3,000	80	ENML-N-350	68	2
EZ-ENM-425	1/2"	13/16"	25	2,500	61	ENML-N-425	54	1
EZ-ENM-450	1/2"	¹³ /16"	50	2,500	82	ENML-N-450	68	2
HIGH PRESSURE					.E. 100R16 #1 emperature 25	or #2 wire braid hose suitable 0°F.	for grease	and
EZ-ENH-125	1/4"	9/16"	25	5,000	60	ENHL-N-125	54	1
EZ-ENH-150	1/4"	9/16"	50	5,000	79	ENHL-N-150	68	2
EZ-ENH-350	3/8"	11/16"	50	4,000	80	ENHL-N-350	68	2

REEL DIMENSIONS Technical Data Sheets Available On Website

SIZE INDEX	W	Н	L	Х	Υ	М	N
1	67/8"	187⁄8"	19"	6"	6"	4"	5"
2	81/2"	213/4"	217/8"	6"	6"	4"	5"
	(Overall Dimensions	-	Ba	ise -	Mounting Mounting	Pattern —







EZ-EN SERIES :: REEL SPECIFICATIONS

SWIVEL

 Machined from solid brass 90° full-flow NPT swivel inlet (Zinc plated steel swivel on HP models)

· Swivel Seals: NITRILE

DESIGN & STRUCTURE

- Sturdy, enclosed reel for aesthetic purposes & greater hose protection
- Models with size index #2 feature Coxreels' exclusive Super Hub™ dual axle support system
- Solid, one piece, heavy gauge 1/4" steel base & support post for maximum stability
- 1" solid steel axle & lubricated precision bearings for smooth rotation
- Heavy gauge steel 3-piece casing with adjustable hose roller guide

EZ_COIL RETRACTION

- OUR PATENTED SAFETY SYSTEM THAT RETRACTS UP TO 80% SLOWER THAN CONVENTIONAL SPRING DRIVEN REELS
- Enclosed factory tuned & matched cartridge-style spring motor
- Non corrosive, stainless steel spring, pawl, & zinc plated ratchet
- Multi-position lock ratchet mechanism secures hose at desired length

SIGNATURE FEATURES

- · Professional grade, heavy duty steel construction
- Durable proprietary CPC[™] powder coat process
- Rolled edges & ribbed discs provide strength & safety
- · Leading 2-year manufacturer's limited warranty
- · Made in the U.S.A. Sold & Supported Worldwide

ACCESSORIZE YOUR REEL :: PG 17



Hoses

Mounting Brackets

· Assorted Reel Accessories



1/2 1.0

EZ-E SERIES

EXPANDABLE METAL CABINETS



COXREELS® EZ-E Series "Expandable" multiple bank system is the pinnacle in professional appearance and organization. The cabinets are interlocking and expandable to any number of spring driven reel assemblies required. Designed for easy installation, maintenance and servicing the EZ-E Series system is truly the professional's choice for multimedia delivery in one custom package.

APPLICATIONS ////

- Air/Water Services
- Pneumatic Tools
- Washdown
- Lubrication
- Chemical Fluid Transfer
- General Industrial

Cabinet Mount

- Manufacturing Plants & Facilities
- Maintenance, Repair & Operations
- Automotive Dealerships
- Quick Lube Service Centers

EZ-E SERIES :: REEL SPECIFICATIONS

SWIVEL

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Zinc plated steel swivel on HP models)
- Swivel Seals: NITRILE

DESIGN & STRUCTURE

- Designed for expandable metal cabinets & multiple reel bank systems
- Solid, one piece, heavy gauge 1/4" steel base & support post for maximum stability
- 1" solid steel axle & lubricated precision bearings for smooth rotation

EZECOIL RETRACTION


- OUR PATENTED SAFETY SYSTEM THAT RETRACTS UP TO 80% SLOWER THAN CONVENTIONAL SPRING DRIVEN REELS
- Enclosed factory tuned & matched cartridge-style spring motor
- Non corrosive, stainless steel spring, pawl, & zinc plated ratchet
- Multi-position lock ratchet mechanism secures hose at desired length

SIGNATURE FEATURES

- Professional grade, heavy duty steel construction
- Durable proprietary CPC[™] powder coat process
- · Rolled edges & ribbed discs provide strength & safety
- · Leading 2-year manufacturer's limited warranty
- · Made in the U.S.A. Sold & Supported Worldwide

ACCESSORIZE YOUR REEL :: PG 17

- · 0-Rings & Swivels
- Hoses
- Mounting Cabinet
- Assorted Reel Accessories



EZ-E SERIES

Do not exceed listed hose O.D. to obtain maximum length

LE L'OLITIE		exceed listed nose U.D. to of	italli illaxii	num lengui.				
	HO	SE				LESS HOSE		SIZE
MODEL	I.D.	0.D.	FT.	PSI	APRX. LBS.	MODEL	APRX. LBS.	INDEX
LOW PRESSURE		ith hose ar ss hose ca				ximum temperature 150°F.		
EZ-E-LP-330	3/8"	5/8"	30	300	33	EZ-E-LPL-330	29	1
EZ-E-LP-350	3/8"	5/8"	50	300	46	EZ-E-LPL-350	40	2
EZ-E-LP-430	1/2"	3/4"	30	300	41	EZ-E-LPL-430	36	1
EZ-E-LP-450	1/2"	3/4"	50	300	50	EZ-E-LPL-450	42	2
MEDIUM PRESSURE						se suitable for air, water or oil a perature 250°F.	applications	S.
EZ-E-MP-330	3/8"	5/8"	30	3,000	47	EZ-E-MPL-330	39	1
EZ-E-MP-350	3/8"	5/8"	50	3,000	61	EZ-E-MPL-350	49	2
EZ-E-MP-430	1/2"	3/4"	30	2,500	47	EZ-E-MPL-430	39	1
EZ-E-MP-450	1/2"	3/4"	50	2,500	63	EZ-E-MPL-450	49	2
HIGH PRESSURE					100R16 #1 perature 25	or #2 wire braid hose suitable 0°F.	for grease	and
EZ-E-HP-130	1/4"	9/16"	30	5,000	46	EZ-E-HPL-130	39	3
EZ-E-HP-150	1/4"	9/16"	50	5,000	60	EZ-E-HPL-150	49	4
EZ-E-HP-330	3/8"	11/16"	30	4,000	47	EZ-E-HPL-330	39	3
EZ-E-HP-350	3/8"	¹¹ / ₁₆ "	50	4,000	61	EZ-E-HPL-350	49	4

REEL DIMENSIONS Technical Data Sheets Available On Website

SIZE INDEX	W	н	L	Х	Υ	М	N
1	61/8"	18 ¹ /4"	171/4"	6"	6"	4"	5"
2	83/4"	21"	195/8"	6"	6"	4"	5"
3	7"	181/4"	171/4"	6"	6"	4"	5"
4	91/4"	21"	195/8"	6"	6"	4"	5"
		Overall Dimension	s	Ba	ise —	- Mountin	g Pattern —

COXREELS® ACCESSORY

Cabinet

Length: 241/2" Width: 111/8" Height: 221/4"

- Unlimited expandability
- Easy to install
- Cabinet constructed of 14 gauge steel with 4-roller non-snag hose guide system for reduced hose wear
- All steel access panel
- Mounting bracket is ³/₁₆" bent steel, fits 3" to 8¹/₂" flange on "I" or "H" beam
- · Easy access for connection of air, water, oil, & grease

METAL CABINET: #1796-2 Includes cabinet, access panel & mounting bracket. Weight: 45 lbs. END PANELS: #1798-1 Includes a set of two, all steel construction. Finished & caps the ends of each bank. Weight: 8 lbs.





SIDE MOUNT HOSE REELS FOR CABINET MOUNT

EZ-S SERIES

COXREELS® EZ-S Series "Side Mount" spring driven hose reels for cabinet mount are compact, versatile, and unique in the way they mount and operate. They feature a simple two-bolt mounting pattern for easy installation and detachment for multiple workstation applications. EZ-S Series is available for air/water, oil, grease, oxy-acetylene, and T Grade gas welding hose. The 360° hose direction allows the user to operate the reel in any direction the job demands. Common applications include service units, tool benches, tool boxes, vertical walls and beams, vehicle lift systems, machine tools, service vehicles, or any flat vertical surface.

APPLICATIONS ____

- Air/Water Services
- Pneumatic Tools
- Lubrication
- Chemical Fluid Transfer
- Welding Shop

- General Industrial
- Cabinet Mount
- Service / Mechanic / Utility Vehicles
- Construction Sites



Reel Orientation:
Right Mount is shown with
mounting base on the right
side & hose payout from
the top of the reel


EZ-S SERIES

Do not exceed listed hose O.D. to obtain maximum length.

					20 110	t cxocca notoa nooc c.b. to obtain maxii	ium iongui.
		HOSE				LESS HOSE	SIZE
MODEL	I.D.	0.D.	FT.	PSI	APRX. LBS.	MODEL APRX. LBS.	INDEX
LOW PRESSURE					r service wi air, water o	th a maximum temperature 150°F. r oil.	
EZ-SR13-L125	1/4"	1/2"	25	300	18	EZ-SR13L-L125 14	1
EZ-SL13-L125	1/4"	1/2"	25	300	18	EZ-SL13L-L125 14	1
EZ-SR15-L135	1/4"	1/2"	35	300	23	EZ-SR15L-L135 17	2
EZ-SL15-L135	1/4"	1/2"	35	300	23	EZ-SL15L-L135 17	2
EZ-SR15-L325	3/8"	5/8"	25	300	23	EZ-SR15L-L325 17	2
EZ-SL15-L325	3/8"	5/8"	25	300	23	EZ-SL15L-L325 17	2
EZ-SR17-L350	3/8"	5/8"	50	300	32	EZ-SR17L-L350 25	3
EZ-SL17-L350	3/8"	5/8"	50	300	32	EZ-SL17L-L350 25	3
EZ-SR17-L430	1/2"	3/4"	30	300	34	EZ-SR17L-L430 29	3
EZ-SL17-L430	1/2"	3/4"	30	300	34	EZ-SL17L-L430 29	3

REEL DIMENSIONS Technical Data Sheets Available On Website

SIZE INDEX	w	н	L	Υ	М
1	6"	141/4"	13"	21/2"	91/4"
2	6"	161/2"	151/4"	21/2"	101/4"
3	5 ³ /4"	181/4"	17"	21/2"	13"
-		Overall Dimensions		Base -	Mounting Pattern



EZ-S SERIES :: REEL SPECIFICATIONS

SWIVE

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet
- Swivel Seals: NITRILE

DESIGN & STRUCTURE

- Side mount design for vertical flat surface, cabinet, or enclosed space mounts
- 2-bolt mounting pattern easily mounts & detaches for temporary or permanent installation
- Solid, one piece, heavy gauge 1/4" steel arm base for maximum stability
- 1" solid steel axle & lubricated precision bearings for smooth rotation
- · Hose control bar prevents hose from slipping off the discs

EZ-COIL RETRACTION

- OUR PATENTED SAFETY SYSTEM THAT RETRACTS UP TO 80% SLOWER THAN CONVENTIONAL SPRING DRIVEN REELS
- Enclosed factory tuned & matched cartridge-style spring motor
- Non corrosive, stainless steel spring, pawl, & zinc plated ratchet
- Multi-position lock ratchet mechanism secures hose at desired length.
- · Non-locking, less ratchet option available (add suffix -BXC)

SIGNATURE FEATURES

- · Professional grade, heavy duty steel construction
- \bullet Durable proprietary $\mathsf{CPC^{\mathsf{TM}}}$ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- · Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. Sold & Supported Worldwide

ACCESSORIZE YOUR REEL :: PG 17

- 0-Rings & Swivels
- Hoses
- Assorted Reel Accessories



EZ-SG & EZ-SGW SERIES SIDE MOUNT HOSE REELS WITH GUIDE ARM



COXREELS® EZ-SG & EZ-SGW Series expand the capabilities of the "Side Mount" spring driven hose reels, adding a multi-position guide arm for maximum and convenient hose control. Ideal for tight spaces, the versatile EZ-SG Series (for air/water, oil and grease) and EZ-SGW Series (for oxy-acetylene and T Grade gas welding hose) features a simple two-bolt mounting pattern for easy installation and detachment on any vertical flat surface. Common applications include service vehicles, tool benches, vertical walls and beams, vehicle lift systems, machine tools, and many more. The guide arm and roller assembly are easily moved to one of the six different positions with a standard 1/2" wrench.

APPLICATIONS ////

- Air/Water Services
- Pneumatic Tools
- Weldidng Shops
- Service/Mechanic/Utility Vehicles
 Construction Sites
- Lubrication
- Chemical Fluid Transfer
- General Industrial

EZ-SG SERIES :: REEL SPECIFICATIONS

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Zinc plated steel swivel on HP models)
- Swivel Seals: NITRILE
- · External fluid path with 90° full-flow dual ported brass swivel offering both connections from the same side of the reel (On EZ-SGW Models)
- Swivel Seals: VITON® (On EZ-SGW Models)

DESIGN & STRUCTURE

- · Side mount design for vertical flat surface, cabinet, or enclosed space mounts
- · Adjustable, six position guide arm & roller assembly provide maximum hose control
- · 2-bolt mounting pattern easily mounts & detaches for temporary or permanent installation
- · Solid, one piece, 3/16" steel arm base for maximum stability
- 1" solid steel axle & lubricated precision bearings for smooth rotation

FILE RETRACTION


- OUR PATENTED SAFETY SYSTEM THAT RETRACTS UP TO 80% SLOWER THAN CONVENTIONAL SPRING DRIVEN REELS
- · Enclosed factory tuned & matched cartridge-style spring motor
- · Non corrosive, stainless steel spring, pawl, & zinc plated ratchet
- · Multi-position lock ratchet mechanism secures hose at desired length.
- · Non-locking, less ratchet option available (add suffix -BXC)

SIGNATURE FEATURES

- · Professional grade, heavy duty steel construction
- Durable proprietary CPC[™] powder coat process
- · Rolled edges & ribbed discs provide strength & safety
- · Leading 2-year manufacturer's limited warranty
- · Made in the U.S.A. Sold & Supported Worldwide

ACCESSORIZE YOUR REEL :: PG 17

- · 0-Rings & Swivels
- Hoses
- Assorted Reel Accessories



EZ-SG SERIES

not ex	ceed listed	l hose (n to	ohtain	maximum	lenath

	HO	SE				LESS HOSE		SIZE
MODEL	I.D.	0.D.	FT.	PSI	APRX. LBS.	MODEL	APRX. LBS.	INDEX
LOW PRESSURE		ith hose ar ss hose ca				ximum temperature 150°F.		
EZ-SG13-L125	1/4"	1/2"	25	300	25	SG13L-L125	22	1
EZ-SG13-L135	1/4"	1/2"	35	300	26	SG13L-L135	23	1
EZ-SG13-L325	3/8"	5/8"	25	300	26	SG13L-L325	23	2
EZ-SG17-L350	3/8"	5/8"	50	300	40	SG17L-L350	33	3
EZ-SG17-L430	1/2"	3/4"	30	300	42	SG17L-L430	37	3
EZ-SG19-L450	1/2"	3/4"	50	300	52	SG19L-L450	44	5
MEDIUM PRESSURE						e suitable for air, water or oil ap perature 250°F.	plications.	
EZ-SG17-M325	3/8"	11/16"	25	3,000	46	SG17L-M325	39	3
EZ-SG19-M350	3/8"	11/16"	50	3,000	63	SG19L-M350	51	5
EZ-SG17-M425	1/2"	¹³ /16"	25	2,500	46	SG17L-M425	39	4
EZ-SG19-M450	1/2"	¹³ /16"	50	2,500	65	SG19L-M450	51	6
HIGH PRESSURE		furnished : ations. Max				or #2 wire braid hose suitable fo	r grease an	d hydraulic
EZ-SG17-H125	1/4"	9/16"	25	5,000	45	SG17L-H125	39	4
EZ-SG19-H150	1/4"	9/16"	50	5,000	62	SG19L-H150	51	7
EZ-SG17-H325	3/8"	11/16"	25	4,000	46	SG17L-H325	39	4
EZ-SG19-H350	3/8"	11/16"	50	4,000	63	SG19L-H350	51	8

F7-SGW SFRIFS

			20 1101	CACCCU HISTOU HOSC O.D. TO OD	uiii iiiuxiii	um longun	
	HO	SE			LESS HOSE		SIZE
MODEL	I.D.	FT.	PSI	APRX. LBS.	MODEL	APRX. LBS.	INDEX
OXYGEN-ACETYLENE	Oxy-Acety Use of oth	lene is twir er types of	n-siamese t hose is no	type meeting R.M.A. ar t recommended.	nd C.G.A. type V.D. grade R specifi	cations.	
EZ-SG17W-150	1/4"	50	200	59	EZ-SG17WL-150	47	9
EZ-SG19W-175	1/4"	75	200	77	EZ-SG19WL-175	60	10
OTHER FUELS	Reels with	"T Grade"	hoses are	used for a wide variety	of gases, such as MAPP, propane	e, natural an	d fuel.
EZ-SG17WT-150	1/4"	50	200	59	EZ-SG17WTL-150	47	9
EZ-SG19WT-175	1/4"	75	200	77	EZ-SG19WTL-175	60	10

SIZE INDEX	W	н	L	Υ	М
1	61/4"	151/2"	131/2"	21/2"	14"
2	63/4"	151/2"	131/2"	21/2"	14"
3	63/4"	19 ¹ /2"	17"	21/2"	18"
4	71/4"	191/2"	17"	21/2"	18"
5	81/2"	22"	191/2"	27/8"	201/2"
6	93/8"	22"	191/2"	27/8"	201/2"
7	9"	22"	19 ¹ /2"	27/8"	201/2"
8	91/2"	22"	191/2"	27/8"	201/2"
9	87/8"	19 ¹ /2"	17"	21/2"	18"
10	101/2"	22"	191/2"	21/2"	201/2"
		— Overall Dimensions —		Raco —	Mounting Pattern



SPRING DRIVEN EZ-P-W& EZ-SHW SERIES

COXREELS® EZ-P-W and EZ-SHW Series spring driven "Welding" hose reels are the ideal solution for managing bulky twin line welding hose. The P-W Series, like the EZ-P Series, is more compact in size and shares the reputation for long lasting performance. The EZ-SHW Series has a larger chassis and frame to accommodate longer lengths of welding hose and Coxreels' original Super Hub dual axle support system for increased stability during operation, less vibration and greater structural integrity.

APPLICATIONS ____////

- Manufacturing Plants
- Maintenance, Repair, & Operations
- Welding / Service Trucks

EZ-P-W & EZ-SHW SERIES

Welding Shops

- Garage Settings
- Automotive & Fleet Maintenance
- Pipelines
- Mining, Construction, & Railroad Operations



(UL) Listed[†]

EZ-P-W & EZ-SHW SERIES:: REEL SPECIFICATIONS

SWIVEL

- External fluid path with 90° full-flow dual ported brass swivel offering both connections from the same side of the reel
- · Swivel lock bracket ensures maximum safety
- · Swivel Seals: VITON®

DESIGN & STRUCTURE

- · Designed for Oxy-Acetylene or "T" grade welding hose
- Single pedestal reel with space saving design facilitates workplace organization
- · Guide arm adjusts to wall, floor, & overhead positions
- Solid, one piece, heavy gauge 1/4" steel base & support post for maximum stability
- 1" solid steel axle & lubricated precision bearings for smooth rotation
- Coxreels' exclusive Super Hub[™] dual axle support system on models with size index #2 & #3

EZ-COU RETRACTION

- OUR PATENTED SAFETY SYSTEM THAT RETRACTS UP TO 80% SLOWER THAN CONVENTIONAL SPRING DRIVEN REELS
- Enclosed factory tuned & matched cartridge-style spring motor
- Non corrosive, stainless steel spring, pawl, & zinc plated ratchet
- Multi-position, non-sparking lock ratchet mechanism secures hose at desired length

> SIGNATURE FEATURES

- · Professional grade heavy duty steel construction
- Durable proprietary CPC[™] powder coat process
- · Rolled edges & ribbed discs provide strength & safety
- · Leading 2-year manufacturer's limited warranty
- · Made in the U.S.A. Sold & Supported Worldwide

ACCESSORIZE YOUR REEL .: PG 17


- 0-Rings & Swivels
- · Mounting Brackets
- Hoses
- Assorted Reel Accessories


Do not exceed listed hose O.D. to obtain maximum length.

	HOS	E			LESS HOSE		SIZE
MODEL	I.D.	FT.	PSI	APRX. LBS.	MODEL	APRX. LBS.	INDEX
OXYGEN-ACETYLENE			twin-siames not recomm		ng R.M.A. and C.G.A. type V.D. grade	e R specific	ations. Use
EZ-P-W-125	1/4"	25	200	46	EZ-P-WL-125†	39	1
EZ-SHW-150	1/4"	50	200	64	EZ-SHWL-N-150†	52	2
EZ-SHW-175	1/4"	75	200	80	EZ-SHWL-N-175†	63	3
EZ-SHW-1100	1/4"	100	200	84	EZ-SHWL-N-1100	62	3
OTHER FUELS	Hose suppli variety of g	ied on reel is ases, such a	twin-siames s MAPP, prop	se type grade ane, natural a	"T." Grade "T" reels and hoses are and fuel.	used for a	wide
EZ-P-WT-125	1/4"	25	200	46	EZ-P-WTL-125†	39	1
EZ-SHWT-150	1/4"	50	200	64	EZ-SHWTL-N-150†	52	2
EZ-SHWT-175	1/4"	75	200	80	EZ-SHWTL-N-175†	63	3
EZ-SHWT-1100	1/4"	100	200	84	EZ-SHWTL-N-1100	62	3

SIZE INDEX	W	Н	L	Х	Y	М	N
1	81/2"	185⁄8"	17"	6"	6"	4"	5"
2	10 ¹ /4"	21 ¹ /4"	19 ¹ /2"	6"	6"	4"	5"
3	101/4"	251/2"	24"	6"	6"	4"	5"
		Overall Dimension:	3	Ba	se —	Mountin-	g Pattern —







A-166A

EZ-PC SERIES

POWER CORD REELS



COXREELS® EZ-PC Series spring driven "Power Cord" reels are heavy duty, industrial grade power sources. They replace tangled extension cords and self-retract to increase safety, productivity, and efficiency. Modeled after the EZ-P and EZ-SH Series, the EZ-PC Series are designed for long-lasting, hassle-free performance even under the most demanding conditions.

APPLICATIONS ____////

- Power Tools
- Light Source
- General Industrial
- Manufacturing Plants
- Workshops
- Construction Sites
- Automotive & Fleet Service Centers

EZ-PC SERIES :: REEL SPECIFICATIONS

Listed †

SLIP RING

- External, heavy gauge CPC[™] powder coated steel components cover for simple slip ring routine maintenance
- Electrical current runs through a 25 Amp / 600V rated slip ring (35Amp on select models)
- Include 5' lead cable & grounding plug (Except on less cord models)

DESIGN & STRUCTURE

- · Selection of electrical accessories
- Single pedestal cord reel with space saving design facilitates workplace organization
- Guide arm adjusts to wall, floor, & overhead positions
- \bullet Solid one piece, heavy gauge $^{1}\mbox{/4"}$ steel base & support post for maximum stability
- Coxreels' exclusive Super Hub $^{\text{TM}}$ dual axle support system on models with size index #3 & #4
- 1" solid steel axle & lubricated precision bearings for smooth rotation

FINE TRACTION

- OUR PATENTED SAFETY SYSTEM THAT RETRACTS UP TO 80% SLOWER THAN CONVENTIONAL SPRING DRIVEN REELS
- Enclosed factory tuned & matched cartridge-style spring motor
- Non-corrosive, stainless steel spring, pawl, & zinc plated ratchet
- Multi-position lock ratchet mechanism secures cord at desired length

SIGNATURE FEATURES

- · Professional grade, heavy duty steel construction
- Durable proprietary CPC[™] powder coat process
- · Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- · Made in the U.S.A. Sold & Supported Worldwide

ACCESSORIZE YOUR REEL :: PG 17


Mounting Brackets


• Assorted Reel Accessories

EZ-PC SERIES

		CORD						SIZE
MODEL	ACCESSORY	AWG / NO COND.	CORD FT.	TYPE	VOLTS	AMPS	APRX. LBS.	INDEX
FOR INDOOR US	SE ONLY!	All models ra	ted at 115 vo	olts, 60 hz s	single phase	e only.		
EZ-PC13-5016-A		16 / 3	50	SJ0	115	13	36	1
EZ-PC24-0016-A	Single Industrial	16 / 3	100	SJ0	115	13	73	2
EZ-PC13-5012-A	Receptacle [†]	12 / 3	50	SJ0	115	20	40	1
EZ-PC24-0012-A		12 / 3	100	SJ0	115	20	81	2
EZ-PC13-5012-B	Quad "4 Plug"Industrial Receptacle [†]	12 / 3	50	SJ0	115	20	41	1
EZ-PC24-0012-B	45.0	12 / 3	100	SJ0	115	20	84	2
EZ-PC13-5016-C	Fluorescent Tube Light - Shock Absorbing & Shatter	16 / 3	50	SJT0	115	0.3	37	1
EZ-PC24-0016-C	Resistant [†]	16 / 3	100	SJT0	115	0.3	75	2
EZ-PC13-5016-D	Fluorescent Angle Light with Tool Tap Plug [†]	16 / 3	50	SJT0	115	13	37	1
EZ-PC24-0016-D		16 / 3	100	SJT0	115	13	73	2
EZ-PC13-5016-E	Incandescent Caged Drop Light with Tool Tap Plug [†]	16 / 3	50	SJT0	115	13	36	1
EZ-PC24-0016-E		16 / 3	100	SJT0	115	13	73	2
EZ-PC13-5016-F		16 / 3	50	SJ0	115	13	38	1
EZ-PC24-0016-F	Duplex G.F.C.I. Metal Industrial Receptacle [†]	16 / 3	100	SJ0	115	13	73	2
EZ-PC13-5012-F		12 / 3	50	SJ0	115	20	42	1
EZ-PC24-0012-F		12 / 3	100	SJ0	115	20	83	2
EZ-PC24-0016-X	With Cord, Less Accessory	16 / 3	100**	SJ0	115	13	71	2
EZ-PC13-5012-X	-	12 / 3	50**	SJ0	115	20	40	1
EZ-PC24-0012-X		12 / 3	100**	SJ0	115	20	81	2
EZ-PC13L-5016		16 / 3	50*	SJ0	115	25	31	1
EZ-PC24L-0016	Less Cord,	16 / 3	100*	SJ0	115	25	62	2
EZ-PC13L-5012	Less Accessory	12 / 3	50*	SJ0	115	25	29	1
EZ-PC24L-0012		12 / 3	100*	SJ0	115	25	64	2

SIZE INDEX	W	Н	L	Х	Υ	М	N
1	81/2"	147/8"	131/2"	5"	6"	3"	5"
4	101/4"	251/2"	24"	6"	6"	4"	5"
	Ove	rall Dimens	ions —	Ba	ise —	└ Mountine	a Pattern -







STATIC DISCHARGE CABLE REELS

EZ-SD SERIES



COXREELS® EZ-SD "Static Discharge" cable reels are built heavy duty and designed for long lasting performance. They are specifically design to be used in combustible environments where the static buildup could ignite a spark and subsequent explosion. Static discharge or grounding reels are commonly paired with fuel hose reels found on page 16.

APPLICATIONS ____////

- Fuel / Service Trucks
- Fuel Storage & Dispensing Systems
- Ground Support
- Aviation Static Grounding
- Aviation Refueling
- Vehicle Refueling
- Marine / Ship Refueling / Offshore

Oil Refinery




EZ-SD SERIES

	CABI	Į.		LESS CA	BLE	SIZE
MODEL	FT.	0.D.	APRX. LBS.	MODEL	APRX. LBS.	INDEX
GALVANIZED CA	ABLE					
EZ-SD-35	35	5/32"	18	-	-	1
EZ-SD-50	50	5/32"	20	EZ-SDL-50	18	1
EZ-SD-75	75	5/32"	31	-	-	2
EZ-SD-100	100	5/32"	32	EZ-SDL-100	28	2
STAINLESS STI	EL CABLE					
EZ-SD-35-1	35	5/32"	18	-	-	1
EZ-SD-50-1	50	5/32"	20	EZ-SDL-50	18	1
EZ-SD-75-1	75	5/32"	31	-	-	2
EZ-SD-100-1	100	5/32"	32	EZ-SDL-100	28	2

REEL DIMENSIONS Technical Data Sheets Available On Website

SIZE INDEX	W	н	L	Х	Υ	N
1	37/8"	111/2"	11"	21/2"	6"	4"
2	4"	15"	141/2"	21/2"	6"	4"
		Overall Dimensions		Ba	se -	Mounting Pattern



EZ-SD SERIES :: REEL SPECIFICATIONS

STATIC DISCHARGE

- Available with 7 strand x 7 wire galvanized steel or stainless steel cable
- · High visibility, orange, vinyl cable cover
- Includes cable, ball stop & 50 Amp grounding clamp (100 Amp copper grounding clamp available, consult factory)

DESIGN & STRUCTURE

- Compact static discharge cable reel available in spring rewind or direct hand crank retraction
- Commonly paired with fuel reels & used in combustible environment for grounding purposes
- Guide arm adjusts to wall, floor, vehicle, & overhead positions
- Solid one piece, heavy gauge ¹/₄" steel base for maximum stability
- 1" solid steel axle & lubricated precision bearings for smooth rotation
- · Bottom of base is un-powder coated to ground reel

EZ-COLL RETRACTION

- OUR PATENTED SAFETY SYSTEM THAT RETRACTS UP TO 80% SLOWER THAN CONVENTIONAL SPRING DRIVEN REELS
- Enclosed factory tuned & matched cartridge-style spring motor
- Non corrosive, stainless steel spring, pawl, & zinc plated ratchet
- Multi-position non-sparking lock ratchet mechanism secures cable at desired length

SIGNATURE FEATURES

- Professional grade, heavy duty steel construction
- Durable proprietary CPC[™] powder coat process
- · Rolled edges & ribbed discs provide strength & safety
- · Leading 2-year manufacturer's limited warranty
- · Made in the U.S.A. Sold & Supported Worldwide

ACCESSORIZE YOUR REEL :: PG 17

Mounting Brackets

• Assorted Reel Accessories



EZ-DEF SERIES & EZ-FUELING REELS SPRING DRIVEN



COXREELS® EZ-DEF Series are equipped with a stainless steel, external full-flow swivel and chemical resistant Viton® seals to provide a safe, reliable Diesel Exhaust Fluid (DEF) dispensing solution. The swivel is easy to access for simple seal maintenance and fast DEF dispenser hose installation. Coxreels® professional DEF reeling systems are available in heavy-duty single pedestal (EZ-SH Series) or supreme-duty dual pedestal (EZ-T Series) configurations. Both versatile designs are outfitted with Coxreels' original Super Hub™ dual axle support systems to increase stability and reduce vibration during operation, making these reels the perfect DEF handling solutions for either stationary or rugged mobile applications.

APPLICATIONS ____////

- Vehicle Refueling
- Tankk Trucks
- Fuel / LubeTrucks
- Fuel Storage & **Dispensing Systems**
- DEF Storage & **Dispensing Systems**
- Aircraft Refueling

Marine / Ship Refueling / Offshore

EZ-DEF & EZ-FUELING SERIES: REEL SPECIFICATIONS

DEF SERIES SWIVEL

- Non-corrosive stainless steel 90° full flow NPT swivel for Diesel Exhaust Fluid (DEF) dispensing applications.
- Swivel seals: Viton®

· DEF dispensing hose designed to convey the high-purity, aqueous urea solution DEF. Temperature Range: -40°F to +257°F

FUEL SERIES SWIVEL

- · Machined from solid brass 90° full-flow NPT swivel inlet for fuel dispensing applications. Electroless nickel plated steel swivel on 1" models
- · Swivel seals: Nitrile

FUEL SERIES HOSE

· Fuel dispensing hose designed to convey non-aromatic fuels including diesel, kerosene, fuel oil, & heating oil. Temperature Range: -20°F to +190°F

DESIGN & STRUCTURE

· Each of these reels is built of their standard series with their own unique features & benefits

EZ=COIL RETRACTION

- OUR PATENTED SAFETY SYSTEM THAT RETRACTS UP TO 80% SLOWER THAN CONVENTIONAL SPRING DRIVEN REELS
- · Enclosed factory tuned & matched cartridge-style spring motor
- · Non-corrosive, stainless steel spring, pawl, & zinc plated ratchet
- Multi-position lock ratchet mechanism secures hose at desired length

SIGNATURE FEATURES

- · Professional grade, heavy duty steel construction
- Durable proprietary CPC[™] powder coat process
- · Rolled edges & ribbed discs provide strength & safety
- · Leading 2-year manufacturer's limited warranty
- · Made in the U.S.A. Sold & Supported Worldwide

ACCESSORIZE YOUR REEL :: PG 17

- 0-Rings & Swivels
- Hoses
- · Mounting Brackets
- Assorted Reel Accessories

EZ-DEF SERIES

Models are equipped with DEF hose. Note: Do not exceed listed hose O.D. to obtain maximum length.

modele die equipped man sel model teste se not excess note of selection and manufacture testing and										
	HOS	E				LESS HOSE		SIZE		
MODEL	I.D.	0.D.	FT.	PSI	APRX. LBS.	MODEL	APRX. LBS.	INDEX		
DEF-SH SERIES										
-	1/2"	7/8"	50	300	-	EZ-SHL-N-450-BBX	46	1		
EZ-SH-525-DF-BBX	3/4"	11/16"	25	300	52	•	-	2		
EZ-SH-550-DF-BBX	3/4"	11/16"	50	300	69	-	-	3		
DEF-T SERIES										
-	1/2"	3/4"	50	300	-	EZ-TSHL-N-450-BBX	55	4		
-	3/4"	1½16"	35	300	-	EZ-TSHL-N-535-BBX	67	5		
EZ-TSH-550-DF-BBX	3/4"	11/16"	50	300	83	•	-	5		

COXREELS® Fuel Dispensing Reels are designed to handle various non-aromatic fuel applications including diesel, kerosene, fuel oil, and heating oil. Coxreels® professional fuel dispensing reels are available in heavy-duty single pedestal (SH Series), or supreme-duty dual pedestal (T Series) configurations. These fuel reels are an essential component found in utility, ground support, and bulk liquid handling transport services mounted on fuel storage & dispensing systems, fuel/lube trucks, aircraft refuelers, and tank trucks. The convenient uncoiling systems with the added hose control allow the operator to efficiently handle fuel transfers.

EZ-FUEL HOSE SERIES


Models are equipped with fuel hose. Note: Do not exceed listed hose O.D. to obtain maximum length.

		HOSE				LESS HOSE		SIZE
MODEL	I.D.	0.D.	FT.	PSI	APRX. LBS.	MODEL	APRX. LBS.	INDEX
FUEL HOSE SH SI	ERIES							
EZ-SHF-525	3/4"	13/16"	25	300	52	EZ-SHL-N-525-BXN	45	6
FUEL HOSE T SER	IES							
EZ-TSHF-535	3/4"	1 ³ /16"	35	300	77	EZ-THSL-N-535-BXN	67	7
EZ-TSHF-550	3/4"	13/16"	50	300	83	EZ-TSHL-N-550-BXN	70	7

SIZE INDEX	W	Н	L	Х	Υ	M	N
1	81/4"	211/4"	19½"	6"	6"	4"	5"
2	93/8"	211/4"	19½"	6"	6"	4"	5"
3	97/8"	25½"	24"	6"	6"	4"	5"
4	9%"	211/4"	19½"	8"	9"	7"	8"
5	97/8"	25½"	24"	8"	9"	7"	8"
6	9%"	211/4"	19½"	6"	6"	4"	5"
7	97/8"	25½"	24"	8"	9"	7"	8"
	(Overall Dimension	s	BaBa	ise —	Mountin	g Pattern













ACCESSORIES

SWIVELS & O-RING COMPATIBILITY CHART

		Brass	Zinc Plated Steel	Electroless Nickel Plated Steel	Stainless Steel	In-Line Nickel Plated Steel or Stainless Steel	Melonized Steel	
	1/4"	•	•				•	ĺ
	3/8"	•	•		•			
Available	1/2"	•	•		•			
Swivel I.D. Female NPT fittings	3/4"	•			•			
(*BSPT fittings available)	1"			•	•			
,	1 1/2"			•	•	•		
	2"			•	•	•		
Available	Buna	•	•	•	•	•		_
Swivel Seals	EPDM	•	•	•	•	•		_
(Refer to 0-Ring	Viton®	•	•	•	•	•	•	_
Compatibility Chart for desired application)	AFLAS			•	•			

O-RING COMPABILITY CHART

Intended as a general guideline only. Users must test under their own operating guidelines to determine suitability. Please consult factory if your application is not listed.

 $1 = \text{Recommended} \mid 2 = \text{Fair} \mid 3 = \text{Poor} \mid 4 = \text{Unsatisfactory}$

	ACETYLENE	AIR (-30°FT0 +25°F)	AIR (+25°F T0 200°F)	AIR (200°F TO 300°F)	AIR (300°F TO 400°F)	ANTIFREEZE	FUEL OIL / KEROSENE	GREASE (PETROLEUM BASED)	HYDROCHLORIC ACID	MOTOR OIL (PETROLEUM BASED)	NATURAL GAS	NITROGEN	OXYGEN (200°FT0 300°F)	OXYGEN (COLD)	PESTICIDES	STEAM (BELOW 300°F)	STEAM (300°FT0 400°F)	SEWAGE	SEA WATER	WATER (UP TO 200°F)	
>	1	1	1	3	4	2	1	1	3	1	1	1	4	2	2	4	4	1	1	1	
>	1	1	1	2	4	1	4	4	2	4	4	1	4	2	4	1	2	1	1	1	
>	1	2	1	1	1	2	1	1	1	1	1	1	2	1	1	2	3	2	2	2	
>	1	3	1	1	1	1	2	2	1	2	1	1	4	2	1	2	3	1	1	1	



Brass Swivels

CNC machined from solid brass swivels are built for general multi-purpose applications. Configured in a 90 degree fluid path with full flow designed. Working pressure up to 3,000 PSI & -40°F to 400°F*.



Zinc Plated Steel Swivels

Machined from strong low carbon steel & configured in a 90 degree fluid path with full flow designed. Zinc plated steel swivels are

Zinc plated steel swivels are recommended for non-corrosive applications. Working pressure up to 5,000 PSI & -40°F to 400°F*.



Electroless Nickel Plated Steel Swivels

Machined from strong, low carbon steel & configured in a 90 degree fluid path with full flow designed. Nickel plated steel swivels are recommended for mildly corrosive applications. Working pressure up to 4,000 PSI & -40°F to 400°F*.



Stainless Steel Swivels

Machined from high quality, pure 316 stainless steel & configured in a 90 degree fluid path with full flow design. Stainless steel swivels offer superior corrosion protection. Working pressure up to 5,000 PSI & -40°F to 400°F*.



In-line Swivels

Nickel plated steel or stainless steel swivel configured in an in-line fluid path with full flow design. Working pressure up to 1,500 PSI for 11/2" I.D. & 1,000 PSI for 2" I.D. -40°F to 400°F*.



Melonized Steel Swivels

Configured in a 90 degree fluid path with 1/4" ports, melonized steel swivels are used for hydraulic applications. Working pressure up to 10,000 PSI & -5°F to 400°F*.

*Temperature rating depends on the seal type selected

HOSE UPGRADES

Nitrile Hos

Premium high quality, oil resistant, multi-purpose hose that is excellent for air & water service and many other chemical applications. The high tensile spiral synthetic yarn reinforcement provides excellent kink resistance. This industrial grade hose exceeds RMA Class A-High Oil Resistance requirements. Electrically non-conductive with a minimum resistance of one megohn per inch at 1,000 volts DC. Temperature Range: -20°F to +212°F.

SUFFIX	TUBE MATERIAL	COVER	REINFORCEMENT BRAIDS	I.D.	0.D.	PSI	WEIGHT (LBS/FT.)
OG	Black Nitrile	Black Synthetic Rubber	Spiral Synthetic Yarn	1/4"	1/2"	300	0.12
OG	Black Nitrile	Black Synthetic Rubber	Spiral Synthetic Yarn	3/8"	11/16"	300	0.17
OG	Black Nitrile	Black Synthetic Rubber	Spiral Synthetic Yarn	1/2"	27/32"	300	0.26
OG	Black Nitrile	Black Synthetic Rubber	Spiral Synthetic Yarn	3/4"	15/32"	300	0.39

SYNTHETIC RUBBER Hose

Versatile, general purpose hose that is excellent for air and water service and many agricultural chemical transfer applications. The synthetic rubber tube and cover resists heat, sunlight, ozone and weathering. The high tensile spiral synthetic yarn reinforcement provides excellent kink resistance. This industrial grade hose exceeds RMA class C medium oil resistance requirements. Temperature Range: -40°F to +21°F. *NOT SUITABLE FOR THE TRANSFER OF PETROLEUM PRODUCTS.

SUFFIX	TUBE MATERIAL	COVER	REINFORCEMENT BRAIDS	I.D.	0.D.	PSI	WEIGHT (LBS/FT.)
RH	Black Synthetic Rubber	Red Synthetic Rubber	Spiral Synthetic Yarn	1/4"	1/2"	300	0.12
RH	Black Synthetic Rubber	Red Synthetic Rubber	Spiral Synthetic Yarn	3/8"	¹¹ / ₁₆ "	300	0.17
RH	Black Synthetic Rubber	Red Synthetic Rubber	Spiral Synthetic Yarn	1/2"	27/32"	300	0.25
RH	Black Synthetic Rubber	Red Synthetic Rubber	Spiral Synthetic Yarn	3/4"	15/32"	300	0.37

DEF Hose

DEF dispensing hose with stainless steel fittings is designed to convey the high-purity, aqueous urea solution DEF (Diesel Exhaust Fluid). Hose tube compound is specially formulated with low extraction EPDM & peroxide cured to provide superior extraction levels to significantly reduce contamination that can clog a selective catalytic reduction (SCR) system & stop diesel engine of a vehicle. Verified to meet ISO 22241-1. Temperature Range: -40°F to +257°F. Available in 25° & 50' lengths

SUFFIX	TUBE MATERIAL	COVER	REINFORCEMENT BRAIDS	I.D.	0.D.	PSI	WEIGHT (LBS/FT.)
DF	Peroxide cured, low extraction, EPDM	Peroxide cured, low extraction, EPDM	Polyester braid	3/4"	11/8"	300	0.30

^{*}Stainless steel swivel with Viton® seals is required for DEF applications. **Consult factory for different hose length.

ADAPTORS & — REDUCERS



Adaptors are used where the size of the connection device is larger than, or of an equivalent size, to the entry thread of the enclosure.

Reducers are used where the thread size of the entry device is smaller than the entry thread of the enclosure $\,$

REDUCERS

PART NO.	END FITTING	DESCRIPTION	PSI
10780	NPT	³ /8" NPT-Female x ¹ /4" NPT-Male	300 MAX
7541	NPT	1/2" NPT-Male x 1/4" NPT-Female	150 MAX
7545	NPT	1/2" NPT-Male x 3/8" NPT-Female	200 MAX
7845	NPT	1" NPT-Female x ¹ /2" NPT-Female	3,000 MAX
7845-1	NPT	1" NPT-Male x 3/4" NPT-Female	3,000 MAX
1578	NPT	11/2" NPT-Male x 11/4" NPT-Female	300 MAX

ADAPTERS

10781	GHT	1/2" NPT - Female x 3/4" Garden - Male	250 MAX
10782	GHT	¹ /2" NPT - Male x ³ /4" Garden - Male	250 MAX
10783	GHT	3/4" NPT - Male x 3/4" Garden - Male	250 MAX
10784	NPT	1" NPT - Male x 1" NPT-Male	4,000 MAX
7540	NPT	1/2" NPT - Male x 3/4" NPT - Female	6,000 MAX
7540-1	NPT	1/2" NPT - Male x 1/4" NPT - Female	6,000 MAX
7765-1	NST	1" NPT - Male x 1" NST - Male	300 MAX
7765-2	NST	1½" NPT - Male x 1½" NST - Male	300 MAX
7817	JIC	1/2" NPT - Male x 7/16-20 (-5) JIC	4,000 MAX
7818	JIC	3/8" NPT - Male x 1/2-20 (-4) JIC	4,000 MAX
7821	BSP	1/2" -14 NPT - Male x 1/4" 19 BSP - Female	4,500 MAX
7848	NPT	¹ /2" - 14 NPT - Male x M14 1 ¹ /2" Female	6,000 MAX
8165	Victaulic	2" NPT - Male x Victaulic	1,000 MAX



ACCESSORIES


MOUNTING A	MOUNTING &				REEL S	SERIES		
ROLLER B	RACKETS	PART NO.	EZ-P	EZ-SH, EZ-MP & EZ-HP	EZ-T	EZ-EN	EZ-PC	EZ-P-W & EZ-SHW
	Swing Bracket For vertical surface mounting, allows reel	15720	•	•		•	•	•
	to swing 180°. Powder coated crinkle black 1/4" steel. Weight: 5 lbs.	15725			•			
	Swivel Bracket For horizontal surface mounting, ball bearing rota- tion, allows reel to swivel 345. Powder coated crinkle black heavy gauge steel. Weight: 6 lbs. NOT FOR USE IN CEILING APPLICATIONS.	15721	•	•	•	•	•	•
	EZ-Up Bracket Reel easily slides in & out for easy overhead mounting. Use as an alterna- tive to the #MR-1. Must be ordered with #15724 for "!" or "H" beam installations. Weight: 6.5 lbs.	15723	•	•	•	•	•	•
*	EZ-Up "I" or "H" Beam Adapter Must be ordered with #15723. Powder coated crinkle black, all steel construction. Weight: 5 lbs.	15724	•	•	•	•	•	•
	Mounting Bracket For overhead mounting, fits 3" to 8 1/2" flance on "!" or	MR-1	•	•		•	•	•
	3" to 8 1/2" flange on "1" or "H" beam. Powder coated crinkle black 3/16" bent steel. Weight: 13 lbs.	MRT-1			•			
	4-Way Roller Bracket Heavy gauge steel, powder coated Coxreels blue (4RB)	4RB 1/4"-3/4"	•	•	•	•	•	•
Q	Available in stainless steel (4RB-SS). Weight: 1 lbs.	4RB-SS	•	•	•	•	•	•

F7_C CFRIFC	MOUNTING &		E	Z-S SERIE	S MODELS	S
ROLLER B		PART NO.	EZ-SR13 & EZ-SL13	EZ-SR15 & EZ-SL15	EZ-SR17 & EZ-SL17	EZ-SR19 & EZ-SL19
		15726-13	•			
	Dual Side Mount Bracket	15726-15		•		
	Heavy gauge steel, powder coated crinkle black. Weight: 5 lbs.	15726-17			•	
		15726-19				•
12	Single Side	SMB1	•	•		
Mount Bracket Heavy gauge steel, powder coated crinkle blackWeight: 2 lbs.		SMB2			•	
		SMB3				•

VC INLET HOSE SSEMBLIES	PART NO.	FITTINGS	I.D.	LENGTH	PSI
	5150-1.5	1/4" Male x Female NPT	1/4"	18"	300
	5153-1.5	3/8" Male x Female NPT	3/8"	18"	300
	5154-1.5	1/2" Male x Female NPT	1/2"	18"	300
	5155-1.5	3/4" Male x Male NPT	3/4"	18"	300
	5224-1.5	3/8" Male x Male NPT	3/8"	18"	3,000
	5256-1.5	¹ /2" Male x Male NPT	1/2"	18"	2,500
	5290-1.5	3/4" Male x Male NPT	3/4"	18"	1,500
TO AND ADDRESS OF THE PARTY OF	5304-1.5	1/4" Male x Male NPT	1/4"	18"	5,000
	5336-1.5	³ /8" Male x Male NPT	3/8"	18"	4,000
	15717	Garden 3/4" NPTM (w/Part #10781) x 3/4" NP	3/4"	48"	300
	5423-1.5	Twin Grade R ¹ /8" NPTM x BB 9-16 UNF	1/4" Twin	18"	200
	5424-1.5	"T" Grade Twin Grade R 1/8" NPTM x BB 9-16 UNF	1/4" Twin	18"	200

90° ELBOWS	PART NO.	FITTING THREAD	I.D.	PSI
	6088	Brass LP Male x Female NPT	1/4"	300
	208	Brass LP Male x Female NPT	3/8"	300
	222	Brass LP Male x Female NPT	1/2"	300
-21	385	Brass LP Male x Female NPT	3/4"	300
ALCOHOL: NAME OF THE PARTY OF T	500	Steel MP Male x Female NPT	3/8"	3,000
	1671	Steel MP Male x Female NPT	1/2"	3,000
	15014	Steel MP Male x Female NPT	3/4"	1,250
	616	Steel HP Male x Female NPT	1/4"	5,000
	617	Steel HP Male x Female NPT	3/8"	5,000

HOSE STOPS	HOSE STOPS	HOSE GUARD PART NO.	HOSE		CORD	OVERALL
& GUARDS	PART NO.		I.D.	0.D.	COUD	UVENALL
	131	237-1	1/4"	1/2"	12/3 SJO	21/2"
	131-1	237-1	-	-	16/3 SJO	21/2"
	633	237-1	1/4" T	win Line	-	31/2"
	131-3	237-1	3/8"	21/32"	10/3 SO	21/2"
	131-4	398-1	1/2"	3/4"	-	21/2"
	254	-	1/2"	3/4"	-	31/2"
	430	398-1	3/4"	1"	-	31/2"
	20214	-	1"	19/16"	-	5"
	20215	-	11/4"	113/16"	-	5"
	20216	-	11/2"	21/16"	-	5"
	00047		0"	00/		



Designed to limit the degree of bending without compromising the integrity of the hose assembly while also preventing the hose-end from kinking, excessive wearing, & tearing.

QUICK Disconnects	PART NO.	I.D.	DESCRIPTION	CONNECTION	PSI	
	10759-1	1/4"	Quick" Disconnect	NPT (F)	300	
	10759-2	3/8"	Quick Disconnect	NPT (F)	300	
Quiek disconnect couplings thread entered on the properties to provide feet leak proof connections for low						

Quick disconnect couplings thread onto end of hose fitting to provide fast, leak-proof connections for low pressure hose lines. Conveniently connect, interchange, & secure pneumatic tools or other spraying devices to any air, water, chemical or other hose lines.

2 YEAR WARRANTY -

Products manufactured by Coxreels are warranted for a period of two years from the date of sale to original purchaser. If within such warranty period any such equipment is proved, to Coxreels' satisfaction, to be defective, Coxreels shall be liable for the repair or, at Coxreels' option, replacement when the product is returned, freight prepaid, to Coxreels' plant or a Coxreels' service dealer. Coxreels' obligation hereunder shall be confined to such repair or replacement and shall be further conditioned upon Coxreels receiving written notice of any alleged defect within ten days after its discovery. Coxreels assumes no responsibility for improper choice of models or where products are used in excess of rated capacities and design functions, or under abnormal conditions. We make available a free engineering service to help with any product selection, application or problem.

Warranty is void if the product or any part thereof has been tampered with, altered, or repaired by other than authorized service personnel. Coxreels' responsibility ceases upon delivery to any common carrier, and we do not, unless previously instructed, insure shipments beyond point of delivery to such carrier. Any products, components or accessories that are not manufactured by Coxreels and are supplied by other manufacturers are subject to their respective guarantees or warranties. Certain products will carry their own warranties. Equipment specially built to customers specifications and requirements is not subject to cancellation nor returnable for credit under any condition. We reserve the right to modify or alter materials, dimensions, design and construction, when necessary, to improve performance.

STATEMENT OF HOSE APPLICATIONS

Coxreels does not manufacture any hose. All hose supplied by Coxreels is selected from reliable commercial sources and is recommended for application on the basis of data supplied by the manufacturer. Coxreels assumes no responsibility for any other application or use. Hose supplied by Coxreels carries the warranty as listed by the manufacturer (90 days).

NO YEAR

TERMS

- Net 30 days on approved creditMinimum billing \$25.00
- Service charge 11/2% on past due accounts

FREIGHT

- F.O.B. Factory
- · Our responsibility ceases upon delivery to common carrier. Consignee must file claim for shortage and damaged freight with the carrier.

DELIVERY

 Most standard items are shipped in five - ten business days or less. Consult customer service for availability.

RETURN POLICY -

 No material will be accepted for return without written authorization by the factory, and a return goods authorization number assigned. Materials must be returned prepaid. A 20% restocking fee and a \$5.00 repacking charge normally applies. No material will be accepted for a credit after one year from the date of purchase. Custom products and special orders are not returnable.

Coxreels' Customer Service - 1.800.269.7335
Call and request a Returned Merchandise Authorization# (RMA #). Warranty claims must be made by authorized Coxreels distributors. Be prepared to give the following information: product model number, serial number and purchase invoice number.

- Replacement parts ordered will be invoiced to your account.
 Once given an RMA #, you must write it on all boxes and paperwork. Coxreels will not accept your return without an RMA #.
- · Upon receiving the return, if it is determined to be covered under warranty, a credit memo will be issued and mailed to you for your records.



ASE REVIEW ALL SAFETY INFORMATION BEFORE CHOOSING AND USING ALL ECUS INJURY, DEATH AND DESTRUCTION OF PROPERTY can result from improper selection or improper use of products described in this ELS has no control over the number and variety of applications for which its products may be purchased or the conditions under which the ELS liability on any claim, whether in contract, tort (including negligence), or otherwise, for any loss or damage shall in no case exceed the price part thereof which give rise to claim. However, the general information contained herein shall allow the customer to select and assume all that acceptability and fitness for specific applications. As always, COXREELS technical assistance and support is available for your convenience.



WARNING - USER RESPONSIBILITIES

The customer, installer, and end users shall, through analysis and testing, assume sole responsibility in making the final selection of reels and accessories. Furthermore, these parties shall hold COXREELS harmless for all liability, claims, suits, and expenses incurred. These parties shall ensure training, performance, endurance, routine inspections, maintenance, safety precautions and warnings regarding the application are enforced at all times. COXREELS is not responsible for use of products in excess of rated and recommended capacities, design functions, or abnormal conditions.



CAUTION - PROPER SELECTION OF ACCESSORIES

Coxreels offers a wide variety of accessory items and optional features for its reels. It is the sole responsibility of the customer, installer, and end users to **ensure that the proper items and features have been selected** to fit the application. Consult with Coxreels technical support for available accessories and optional features which will help you to keep your product safe in its environment. These items may include mounting brackets, guards, guides, and electrical components.



WARNING - FOLLOW INSTRUCTIONS

The customer, installer, and end users shall ensure that all potential users of these products receive continual training and access to all relevant product manuals and safety instructions. This information should be thoroughly reviewed prior to installation, stored and reviewed continually during use of the product. Coxreels assumes no responsibility for fitness of installation and continued use in specific applications. Any overhead installations should be such that the reel is not supported solely by bolts under tension. A safety chain or cable is necessary to eliminate potential for damage or personal injury.



IMPORTANT - FOLLOW GOOD MAINTENANCE PRACTICES

When receiving your products, establish a program for inspection, testing, and periodic replacement of worn items depending on factors such as; severity of application, frequency of equipment use, and past performance indicators. Use only properly trained persons to perform these duties. Update training periodically. **Document** the maintenance, inspections, and testing of products. **Never allow** an improperly functioning reel or accessory product to be put into use.

Documented inspections shall include in part, pressurized units, swivel joints, hose, hose fittings, cable, mounting hardware, roller guides and any such moving parts. Never allow the use of hoses or cables other than what is intended in the design of the reel. Changes in diameter, weight, length, or flexibility can affect the function and may cause damage or personal injury. Consult specific product manuals, or factory, with any questions regarding proper maintenance practices.

The use of any replacement components other than those provided by Coxreels is prohibited. Coxreels shall be held harmless from any improper selection of such components which may affect function and overall safety of the product.

NOTE: All designs specifications and dimensional data contained in this book are subject to change without notice. No additional warranties express or implied including warranties of merchantability for fitness for a particular purpose, are created by the descriptions and depictions of the products on in this book.





INDUSTRY CATALOGS
















PRODUCT CATALOGS
















CORPORATE HEADQUARTERS:

Tempe, Arizona USA Phone: 480.820.6396 Fax: 480.820.5132

Toll Free: 800.COX.REEL Toll Free Fax: 800.229.REEL

www.coxreels.com info@coxreels.com



INTERNATIONAL:

EUROPE / MIDDLE EAST / AFRICA

Phone: +44 (0) 1536 464 990

Fax: +44 (0) 1536 464 999

www.crireels.com sales@crireels.com

